




SPLICE WITH SHRINK TUBING AND INSULATED SPRING CONNECTOR

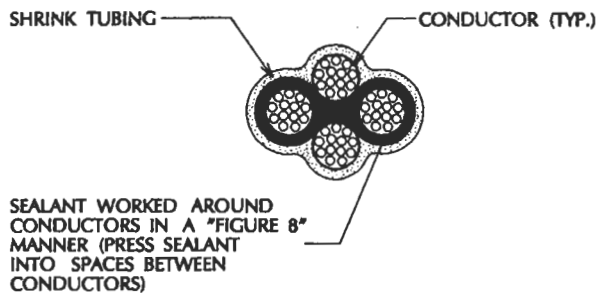

SECTION A - A

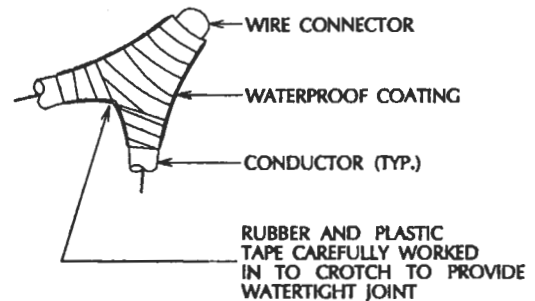

CROTCH DETAIL

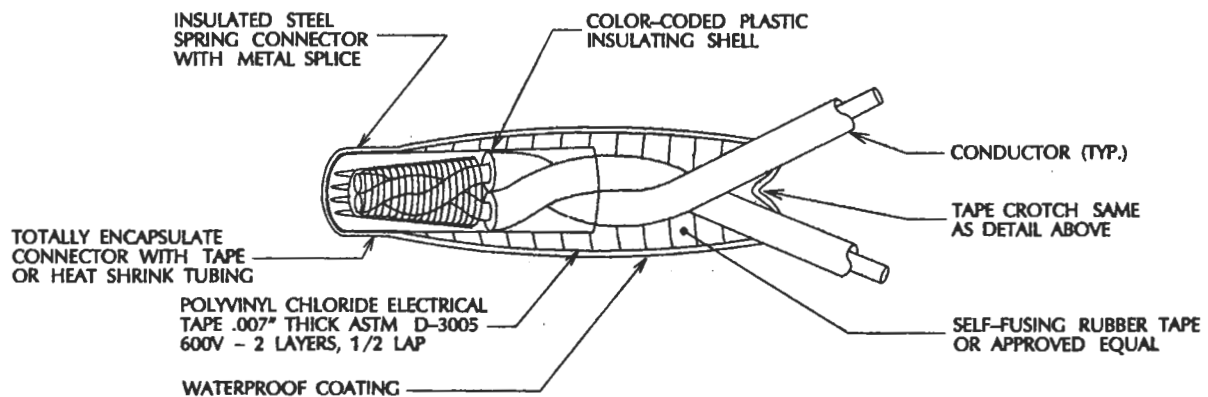

SPLICE WITH INSULATED SPRING CONNECTOR

NOTES:

1. PAINT ALL TAPED SPLICES WITH ELECTRICAL WATERPROOF COATING.
2. HEAT SHRINK TUBING (RATED 600V AC) MAY BE USED IN LIEU OF PVC ELECTRICAL TAPE FOR INSULATED SPRING CONNECTORS.
3. DO NOT EXCEED SPRING CONNECTOR MANUFACTURER'S AWG COPPER WIRE SPLICING COMBINATION RECOMMENDATIONS.

APPROVED BY

[Signature]

DATE

3/3/92

CONDUCTOR SPLICING SPRING CONNECTORS

DEPARTMENT OF PUBLIC WORKS



DRAWING
NO.

E-55